

InDuct (ID) & InDuct-X (ID-X) Series

Cleaner Air Healthier Life



Features of BioZone[®] Air Purification System

Eliminates airborne and surface microorganisms

e.g. bacteria, viruses and fungi

Decomposes volatile organic compounds (VOCs) and other organic compounds

e.g. formaldehyde, benzene and members of PAHs


Removes hazardous chemical gases

e.g. ammonia and hydrogen sulfide

Reduces unpleasant odours


e.g. tobacco smoke, musty odour and cooking smell

BioZone® Air Purification Technology: PhotoPlasma™

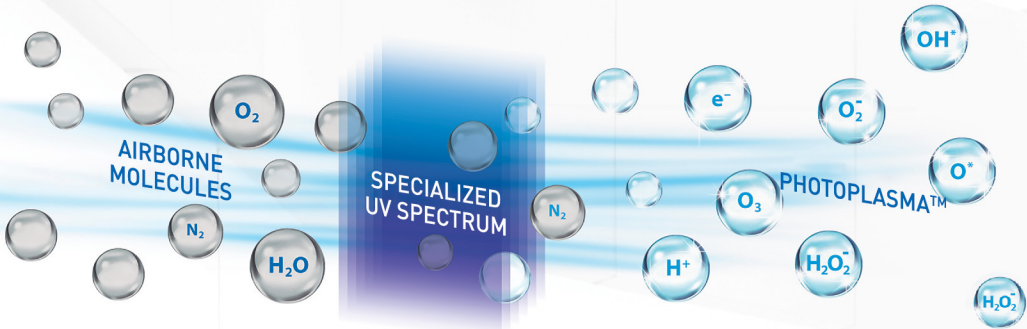


PhotoPlasma™ is generated by airborne molecules such as oxygen and water vapour under the exposure of the specialized UV spectrum. It includes reactive oxygen species, free radicals, electrons, etc., which actively capture various air contaminants, and rapidly destroy their structures through a chain of reactions. In this way the contaminants are decomposed and converted into harmless end-products like carbon dioxide and water.

Applications

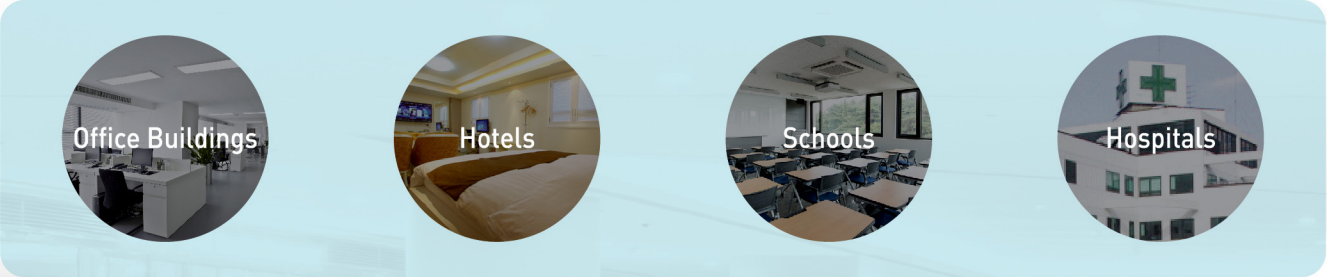

Product Design

InDuct and InDuct-X Series can be installed in any buildings or units with a HVAC system.

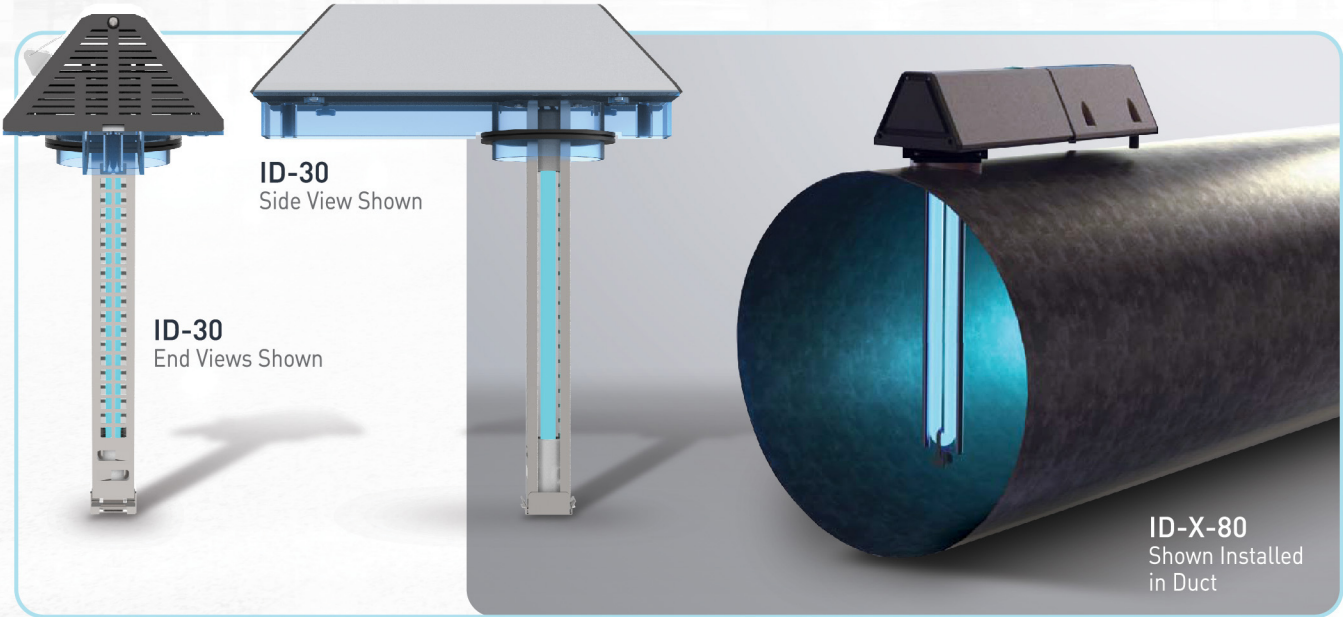


Product Installation



Performance

Proven performance against various air pollutants

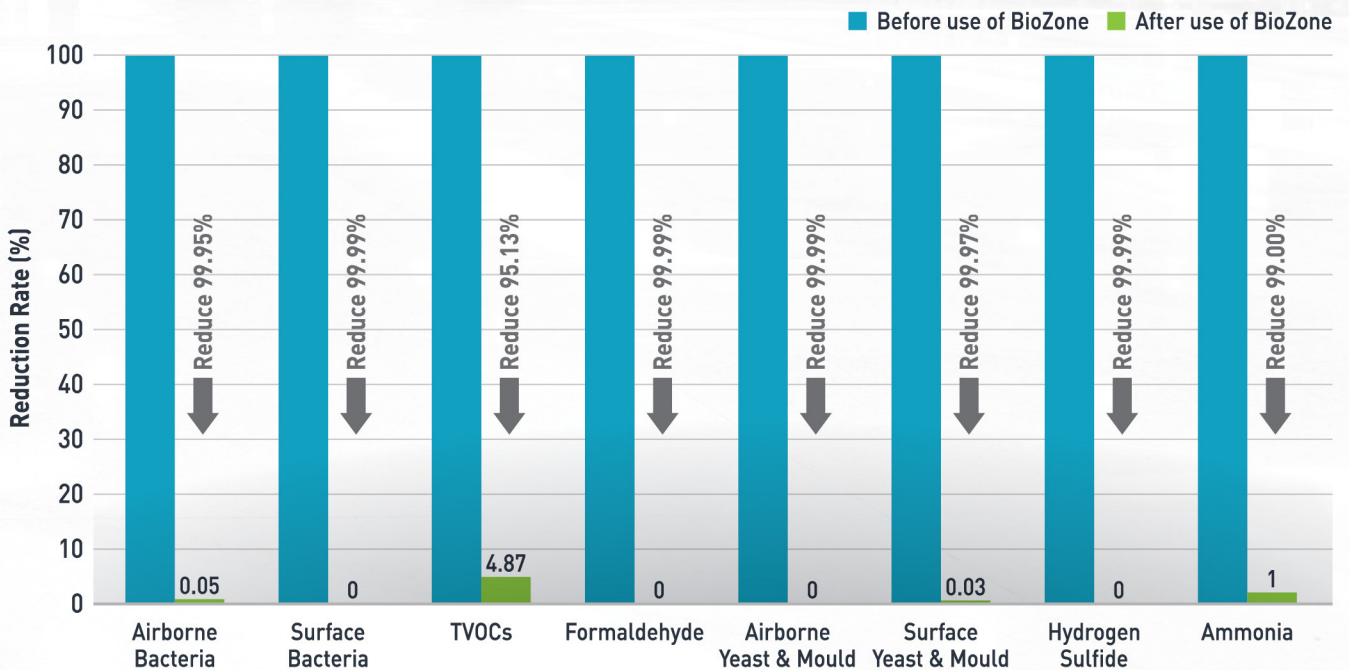

* Samples and tests were taken by third-party accredited laboratories.



The accumulation of airborne pollutants on the HVAC system allows microorganisms to proliferate exponentially to form biofilm, which can reduce heat transfer efficiency thus increasing power consumption. Meanwhile, microorganisms can spread through indoor areas via the system, causing potential outbreaks of respiratory diseases. UVC lamps are sometimes installed in HVAC systems as a means to tackle the issues mentioned. However, it is a passive purification method as the lamps can only kill microorganisms within a specific distance, and various air contaminants cannot be completely eliminated.

BioZone air purification devices are specially designed to fit into HVAC systems to remove chemical and biological pollutants inside the air ducts. Indoor air contaminants can also be tackled by PhotoPlasma, which is evenly allocated by the air distribution system.



Case Study

An international school near Repulse Bay installed BioZone devices at fan coil units to solve the problems of odour, airborne bacteria, and volatile organic compounds (VOCs) in the classroom. After installation, conditions improved so successfully that the school achieved 'Excellent Class' status under the Hong Kong government's 'Hong Kong Indoor Air Quality Objectives'.

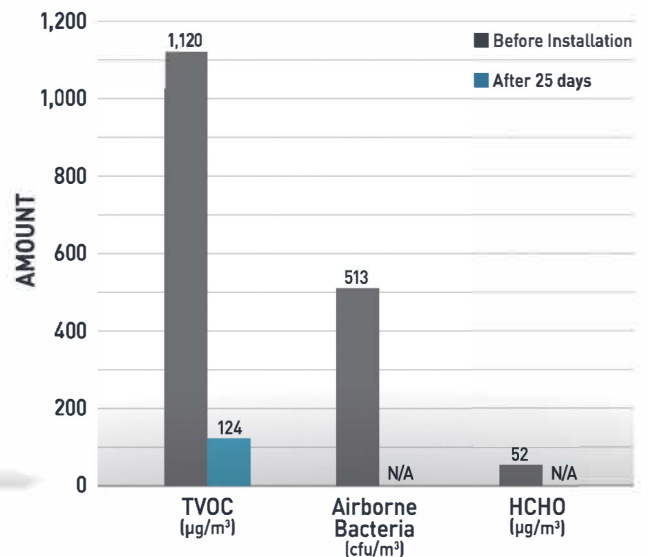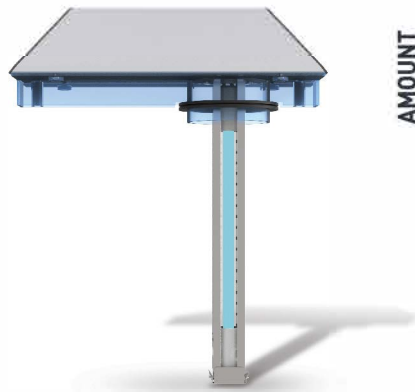

Nominal Specifications

Model:	ID-10	ID-20	ID-30	ID-40	ID-60	ID-80	ID-X-60	ID-X-80
Base Size (mm):	200(L) x 100(W) x 76(H)				300(L) x 100(W) x 76(H)		300(L) x 100(W) x 76(H)	
Lamp Size (mm):	203			280		381		280 381
Weight (g):	580			675		1050		2495
Power Input:	110-240VAC, 50-60Hz							
Power Adaptor:	12VDC, B centertap+				12VDC, B centertap+		12VDC	
Power Consumption (W):	<24				<60		<100	
Lamp Life:	1 year							

© 2018 BioZone. All rights reserved.

For more information, please contact us at info@biozone.com.hk

or visit our website at www.biozone.com.hk

Our products are available in various sizes and configurations.

For more information, please contact us at info@biozone.com.hk

or visit our website at www.biozone.com.hk

Our products are available in various sizes and configurations.

Contact us:

COX International Limited
Room 03, 10/F, Technology Plaza,
29-35 Shai Tsui Road, Tsuen Wan,
New Territories
Hong Kong

Tel: (852) 3101 2323

Fax: (852) 3101 2320

Website: <http://www.cox-int.com.hk/>

Email: sales@cox-int.com.hk

